


SHENZHEN DEP Electronics Co., Ltd
深圳德平电子有限公司

EMI 低通滤波器
EMI Los Pass Filter

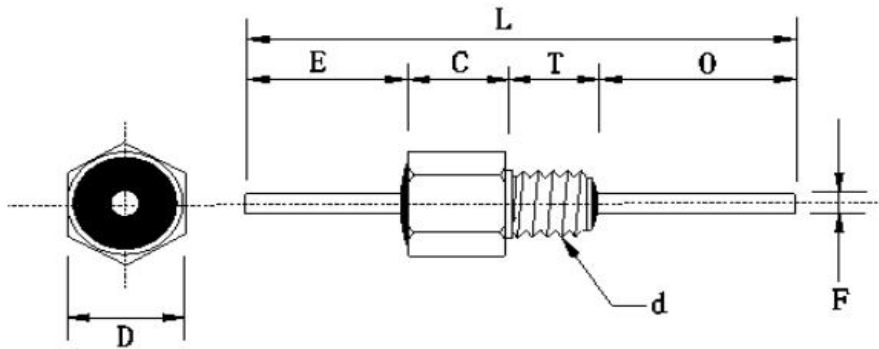

Size Codes (mm)

Drill Size	D	d	L	T	C	F	E	0	Circuit	Voltage
M2.5	3.3±0.1	M 2.5 X0.45	30±2	3.0±0.2	3±0.2	0.75±0.05	8±1	16±1	C	VDC
M3	4±0.1	M 3 X 0.5	30±2	3.0±0.2	3±0.2	0.75±0.05	8±1	16±1	C	VDC
M4	5±0.2	M4 X 0.7	30±2	7.0±0.2	6±0.2	0.75±0.05	8±1	9±1	C/L/PI	VDC
	5±0.2	M4 X 0.7	28±2	4.0±0.2	2.5±0.2	0.75±0.05	10.5±1	11±1	C/L	VDC
	6±0.2	M4 X 0.7	30±2	5.0±0.2	2.5±0.2	0.75±0.05	9±1	13±1	C/L	VDC
M5	8±0.2	M5 X 0.7	35±2	5.0±0.2	6.5±0.2	1.5±0.1	10.5±1	13±1	C/L/PI	VDC/AC
	6±0.2	M5 X 0.7	28±2	7.0±0.2	4.0±0.2	0.75±0.05	8±1	9±1		
M6	8±0.2	M6 X0.75	35±2	5.0±0.2	6.5±0.2	1.5±0.1	10.5±1	13±1	C/L/PI	VDC
									C	VAC
	8±0.2	M6 X 1.0	35±2	5.0±0.2	6.5±0.2	1.5±0.1	10.5±1	13±1	C/L/PI	VDC
									C	VAC
M8	12±0.2	M8 X 1.0	35±2	7.5±0.2	6.5±0.2	2.0±0.1	10±1	11±1	C/L/PI	VDC
									C	VAC
M10	12±0.2	M 10 X 1.0	35±2	5.0±0.2	6.5±0.2	2.0±0.1	10.5±1	13±1	C/L/PI	VDC
									C	VAC
8-32	5±0.2	8-32-UNC-2A	30±2	6.7±0.4	2.5±0.2	1.0±0.05	5.0±1	16±1	C/L/PI	VDC
Customer designed Drill Size are available										

电话: 0755-23023733
传真: 0755-85287900

Email: xufei66@dephk.com
<http://www.dephk.com>